


Features

- Floor mounting
- Robust construction
- Roller mounted cover
- Multiple vee belt drive with spherical roller bearings
- Safety interlocked motor & cover

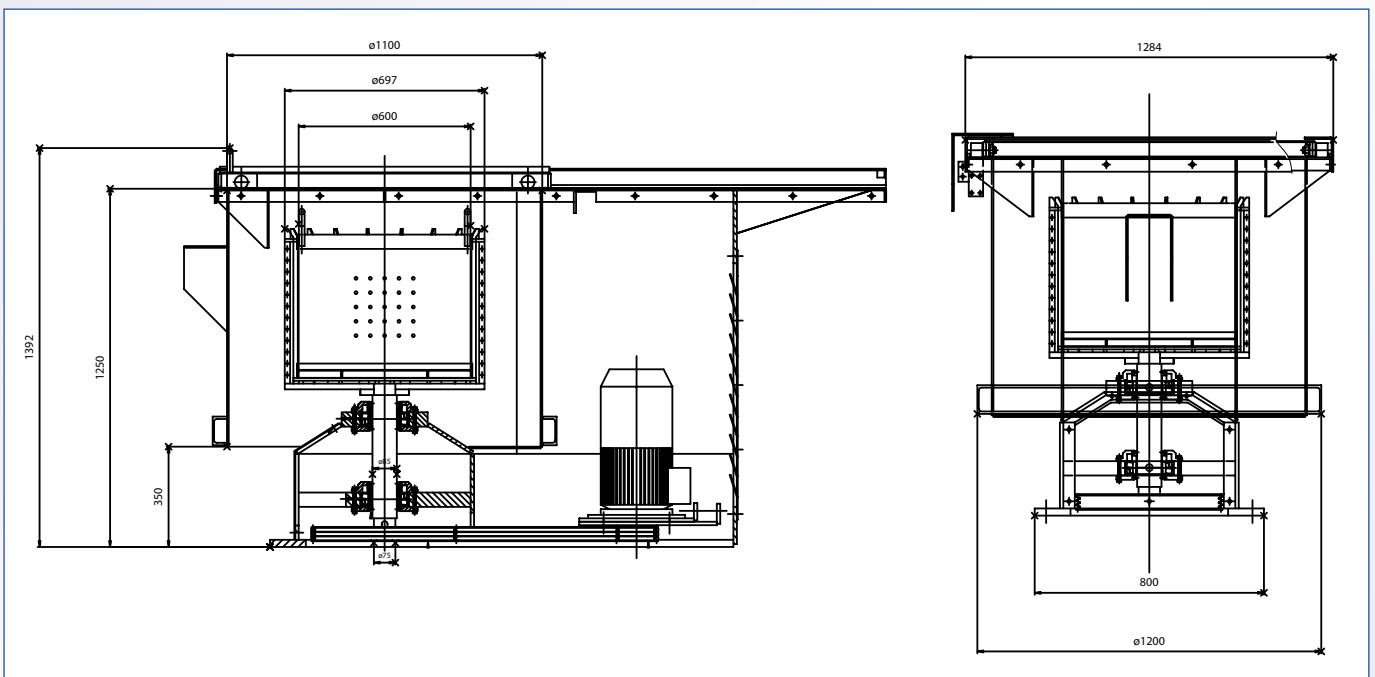

Specifications

- **Basket size** 400mm to 600mm diameter
400mm to 600mm high
- **Speed range** 400 to 750 rpm
- **Basket fill** 45kg to 80kg maximum
- **Time to full speed** 3.5 seconds
- **Braking time** 3.5 seconds



Centrifuge Machine with semi-automatic basket discharge with integral quench unit

- **Application**

High temperature galvanizing

Typical application - galvanizing nuts and bolts

- **Zinc temperature**

450°C to **560°C**

- **Heating systems**

Oil, gas or dual fuel

Fully automatic ignition

- **Temperature control**

Fully automatic with digital instrumentation


- **Insulation**

Bath - special refractory brickwork

Heating chamber - lightweight low thermal mass insulation

- **Shipping**

Baths shipped complete with brickwork and ready to use

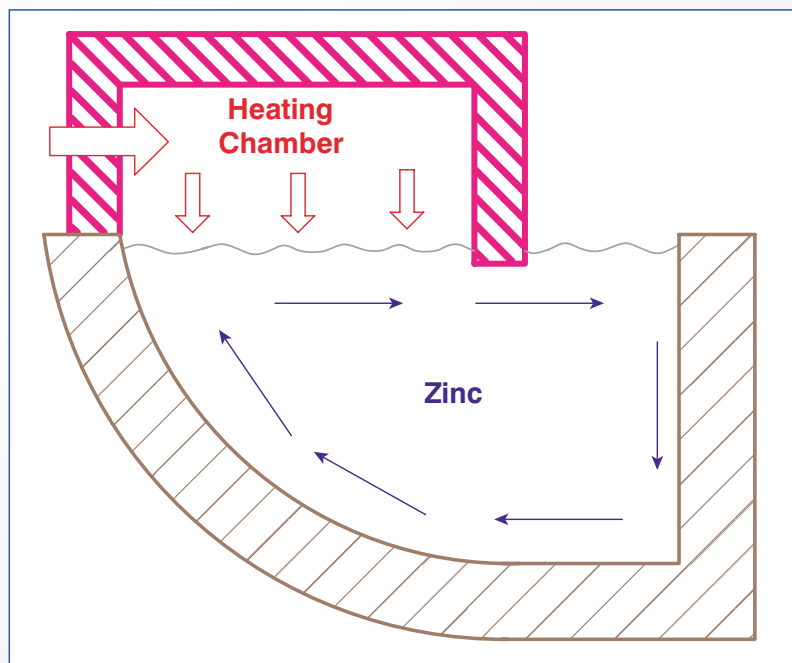

For more information please contact us at:

Protherm Engineering (Walsall) Ltd.
Unit 33, Birchbrook Industrial Estate, Lynn Lane, Shenstone, Lichfield WS14 0DJ

T +44 (0)1543 481143 F +44 (0)1543 480330 E info@prothermengineering.co.uk